





Description

Standing server rack with Vented door, 4 fans, 1 shelf and 1 PDU 8 outlet

Main material:

Cold-rolled steel

Load capacity:

Static load: 800KG

Surface treatment:


Degreasing, pickling, phosphating ,laundering, powder coating

Features:

- Exquisite design with precise dimensions and craftsmanship
- Two side panels for each side can be separately open with locks, which are easy to operation and maintenance
- Law Two back sides with multifunctional cable routing panels
- High-class locks
- Casters and support feet can be installed simultaneously
- Optional pedestals for fixation, cable routing, ventilation, and rat proof
- Curved front screen door & back double screen door enable equipment to ventilate well
- Various optional accessories
- Pro-Rack logo is printed on the side panel




Structure




- 1. Top cover
- 2. Bottom plate
- 3. Fans
- 4. Frame
- 5. Front door
- 6. Back door
- 7. Side panel
- 8. Horizontal bracket
- 9. Profile rails
- 10. Shelf
- 11. Cable manager
- 12. Junction box
- 13. Caster
- 14. Support foot


Size

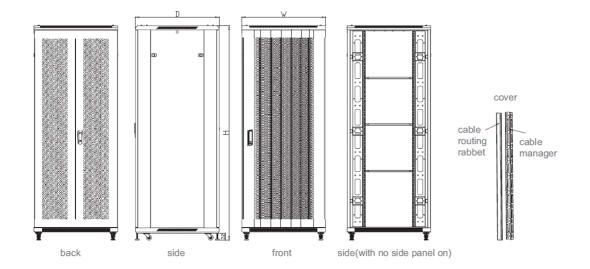



Installing

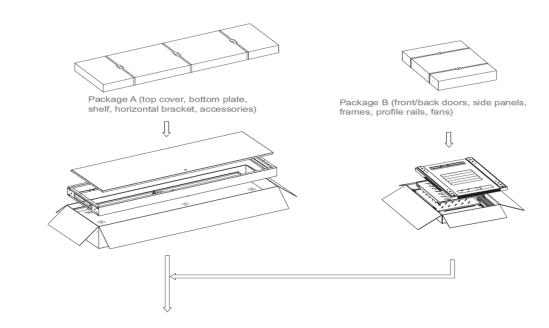

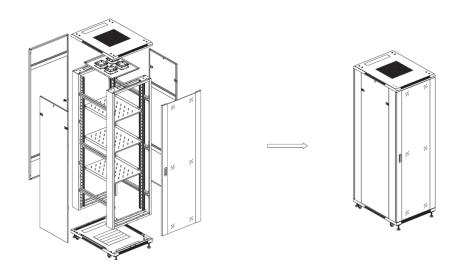



Technical parameters:

| NANES | QUANTITY | UNIT | MATERIALS | SURFACE TREATMENT | REMARKS |
|-----------------------|----------|------|--|----------------------|------------------|
| Top Covers | 1 | Pc | 1.2mm cold-rolled steel | powder coating | |
| Bottom plates | 1 | Pc | 1.2mm cold-rolled steel | powder coating | |
| Fans | 4 | Pc | 1.2mm cold-rolled steel | powder coating | |
| Frames | 2 | Pc | 1.2mm cold-rolled steel | powder coating | |
| Front doors | 1 | Pc | 5mm tempered glasses 1.2mm cold-rolled quality steel | powder coating | door type E or B |
| Back doors | 1 | Pc | 1.2mm cold-rolled steel | powder coating | door type K |
| Side panels | 2 | Pc | 1.0mm cold-rolled steel | powder coating | |
| Rails | 4 | Pc | 2.0mm cold-rolled steel | powder coating | |
| Shelves | 1 | Pc | 1.2mm cold-rolled steel | powder coating | |
| Casters | 4 | Pc | | | |
| M12 support feet | 4 | | | | |
| Cage nuts | 40 | | | | |
| Sockets with 8 outlet | 1 | | | | |
| Beams | 6 | Pc | 1.2mm cold-rolled steel | powder coating | |
| Junction boxes | 12 | Pc | 2.0mm cold-rolled steel | | |

| TYPES | PR-FG8842 | | |
|--------------|---------------|--|--|
| | 1 11-1 30042 | | |
| CAPACITY (U) | 42U | | |
| WIDTH | 800 | | |
| DEPTH | 800 | | |
| HEIGHT | 2055 | | |
| | WHOLE PACKAGE | | |
| | | | |
| WIDTH | 820 | | |
| DEPTH | 1020 | | |
| HIGHT | 2065 | | |
| VOLUME (M³) | 1.389 | | |
| | FLAT PACKAGE | | |
| PACKAGE A | 1980*820*320 | | |
| PACKAGE B | 1020*820*130 | | |
| PACKAGE C | 1910*60*730 | | |
| VOLUMES (M3) | 0.607 | | |
| Front Door | Glass | | |

Color:

BLACK (RAL9005)

