

The background of the entire page is a close-up, angled photograph of a network switch or patch panel. It features rows of blue RJ45 ports with yellow Ethernet cables plugged in. The lighting is dramatic, with a strong blue and yellow glow emanating from the cables and ports, creating a sense of connectivity and data flow. The Prolink logo is overlaid in the top left corner.

PROLINK






We provide our customers with exceptional PRODUCTS in accordance with the highest international standards and also provide SERVICES that meets our customers' needs or exceeds their expectations.

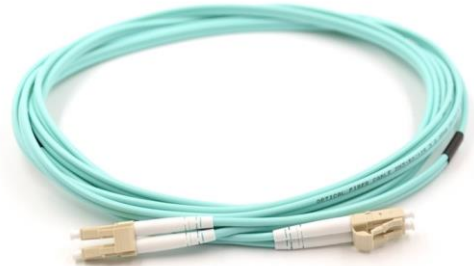
Powered by: **PROLINK**

Discription




ProLink F/O JUMPER CORD ,LC -LC-MM DUPLEX - OM3 10M

Features

-  Small Size, High Precision.
-  Zirconia 1.25mm ceramics ferrule.
-  Low insertion Loss.
-  High Return Loss.
-  Duplex are Available.



Applications

-  Telecom and Datacom Equipment.
-  LAN/WAN
-  Device Terminals

Speciations

Connectors type	LC-LC
Cable	OM3 Duplex 10M
Fiber Type	OM3 50/125
Cable Color	Aqua
insertion loss	≤0.25 dB
return loss	≥30dB
joint endurance	>1000Times
Operating Temperature	-40°C~+70°C
Storage Temperature	-25°C~+60°C
ROHS	Meet 2002/95/EC Requirement