



# PRORACK

Powered by PROLINK

We provide customers with satisfactory products and services according to international standards, to meet different customer needs.



### Description:

- premium outdoor wall mount, size (600mm\*600mm) 70cm thickness 1.5mm, included (1 key lock) ip rating 66, solid door.

### Main material:

- Galvanized plate

### Load capacity:

- Static load: 800KG

### Surface treatment:


- Degreasing, pickling, phosphating, laundering, powder coating

### Features:

- Exquisite design with precise dimensions and craftsmanship
- Galvanized plate is more protected corrosion resistance and more longer lifespan.
- Two side panels for each side can be separately open with locks, which are easy to operation and maintenance
- Two back sides with multifunctional cable routing panels
- High-class locks
- Casters and support feet can be installed simultaneously
- Optional pedestals for fixation, cable routing, ventilation, and rat proof
- Curved front screen door & back double screen door enable equipment to ventilate well
- Various optional accessories
- Pro-Rack logo is printed on the side panel

**Structure:**

1. Top cover
2. Bottom plate
3. Fans
4. Frame
5. Front door
6. Side panel
7. Horizontal bracket
8. Profile rails
9. Shelf
10. Caster
11. Support foot

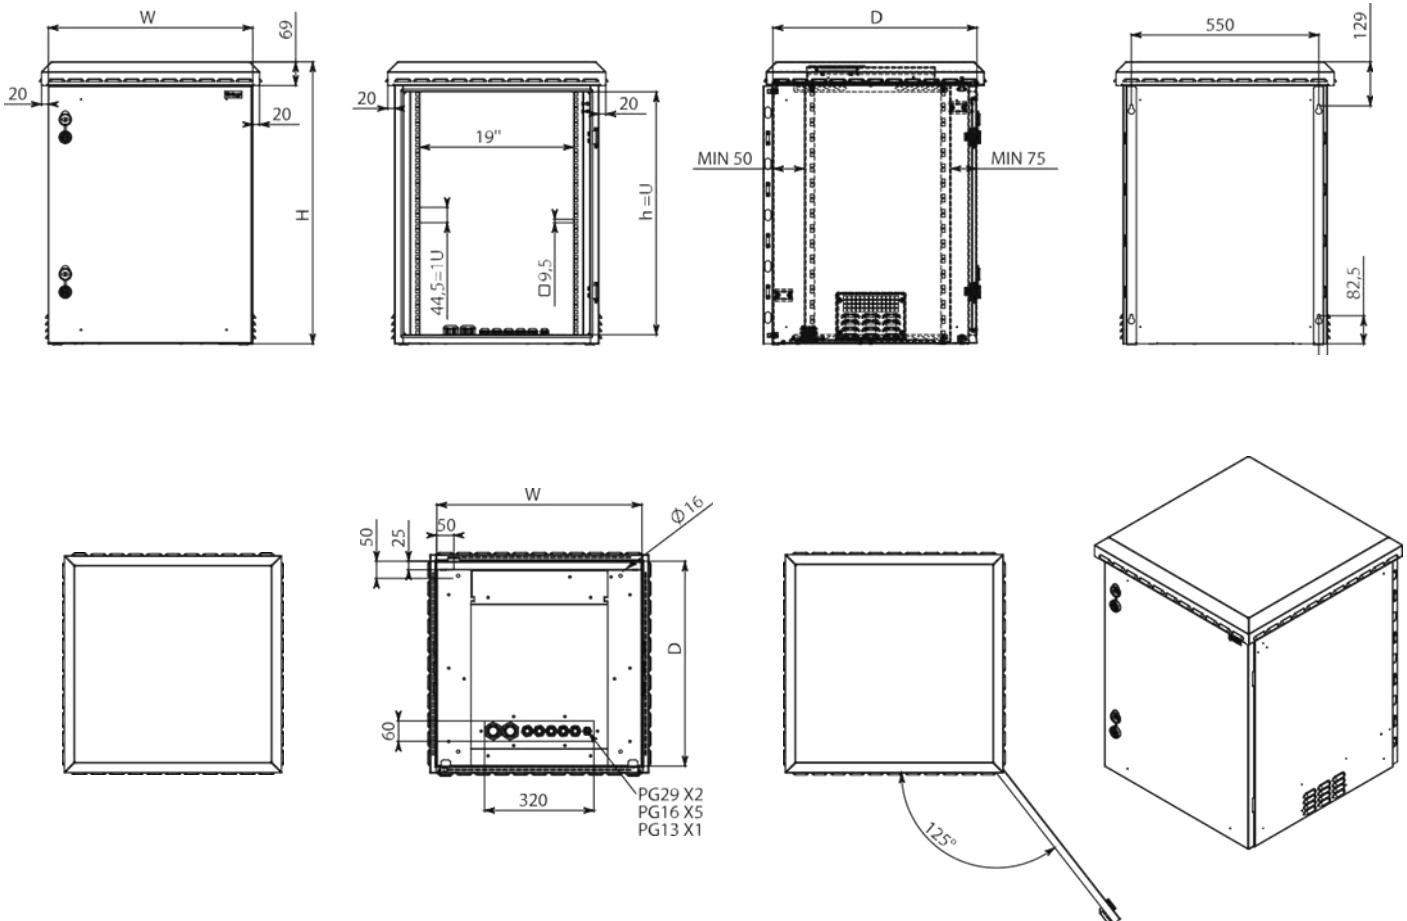

**Technical parameters:**

NANES	QUANTITY	UNIT	MATERIALS	SURFACE TREATMENT	REMARKS
Top Covers	1	Pc	1.2mm cold-rolled steel	powder coating	
Bottom plates	1	Pc	1.2mm cold-rolled steel	powder coating	
Fans	2	Pc	1.2mm cold-rolled steel	powder coating	
Frames	2	Pc	1.2mm cold-rolled steel	powder coating	
Front doors	1	Pc	5mm tempered glasses 1.2mm cold-rolled quality steel	powder coating	door type E or B
Side panels	2	Pc	1.0mm cold-rolled steel	powder coating	
Rails	4	Pc	2.0mm cold-rolled steel	powder coating	
Shelves	1	Pc	1.2mm cold-rolled steel	powder coating	
Casters	4	Pc			
M12 support feet	4				
Cage nuts	20				
Sockets with 8 outlet	1				
Beams	6	Pc	1.2mm cold-rolled steel	powder coating	
Junction boxes	12	Pc	2.0mm cold-rolled steel		

**Technical parameters:**

TYPES	PR-OD6612
CAPACITY (U)	12U
WIDTH	600
DEPTH	600
HEIGHT	648
<b>WHOLE PACKAGE</b>	
WIDTH	660
DEPTH	660
HIGHT	763
Gross product weight (kg)	43
<b>FLAT PACKAGE</b>	
Pallet dimension WxDxH (mm)	650x650x100
Packaging size WxDxH (mm)	660x660x763
Net product weight (kg)	40